



# LADDER-TRACK™ CONVEYOR BELTS

MAXIMIZE EFFICIENCY, MINIMIZE MAINTENANCE

---

[WWW.WIREBELT.COM](http://WWW.WIREBELT.COM)



Flat, uniform surface for gentle product handling.

# LADDER-TRACK™ CONVEYOR BELTS


---

Ladder-Track™ belting is a simple but effective style of conveyor belt, commonly found in bakeries. Its open design provides efficient operation with minimum maintenance as well as facilitating easy and thorough cleaning. Ladder-Track™ is a positively sprocket driven belt which is used in straight running applications. Its light weight and basic configuration makes it a very economic and cost effective style of belting for many different environments.

## ADVANTAGES

- Flat, uniform surface for gentle product handling
- High tensile rods which resist permanent distortion and reduce down-time
- Positive-drive to ensure there are no tracking issues
- Smooth edges for easy movement around transfer
- Easy belt assembly and disassembly due to its simple open construction



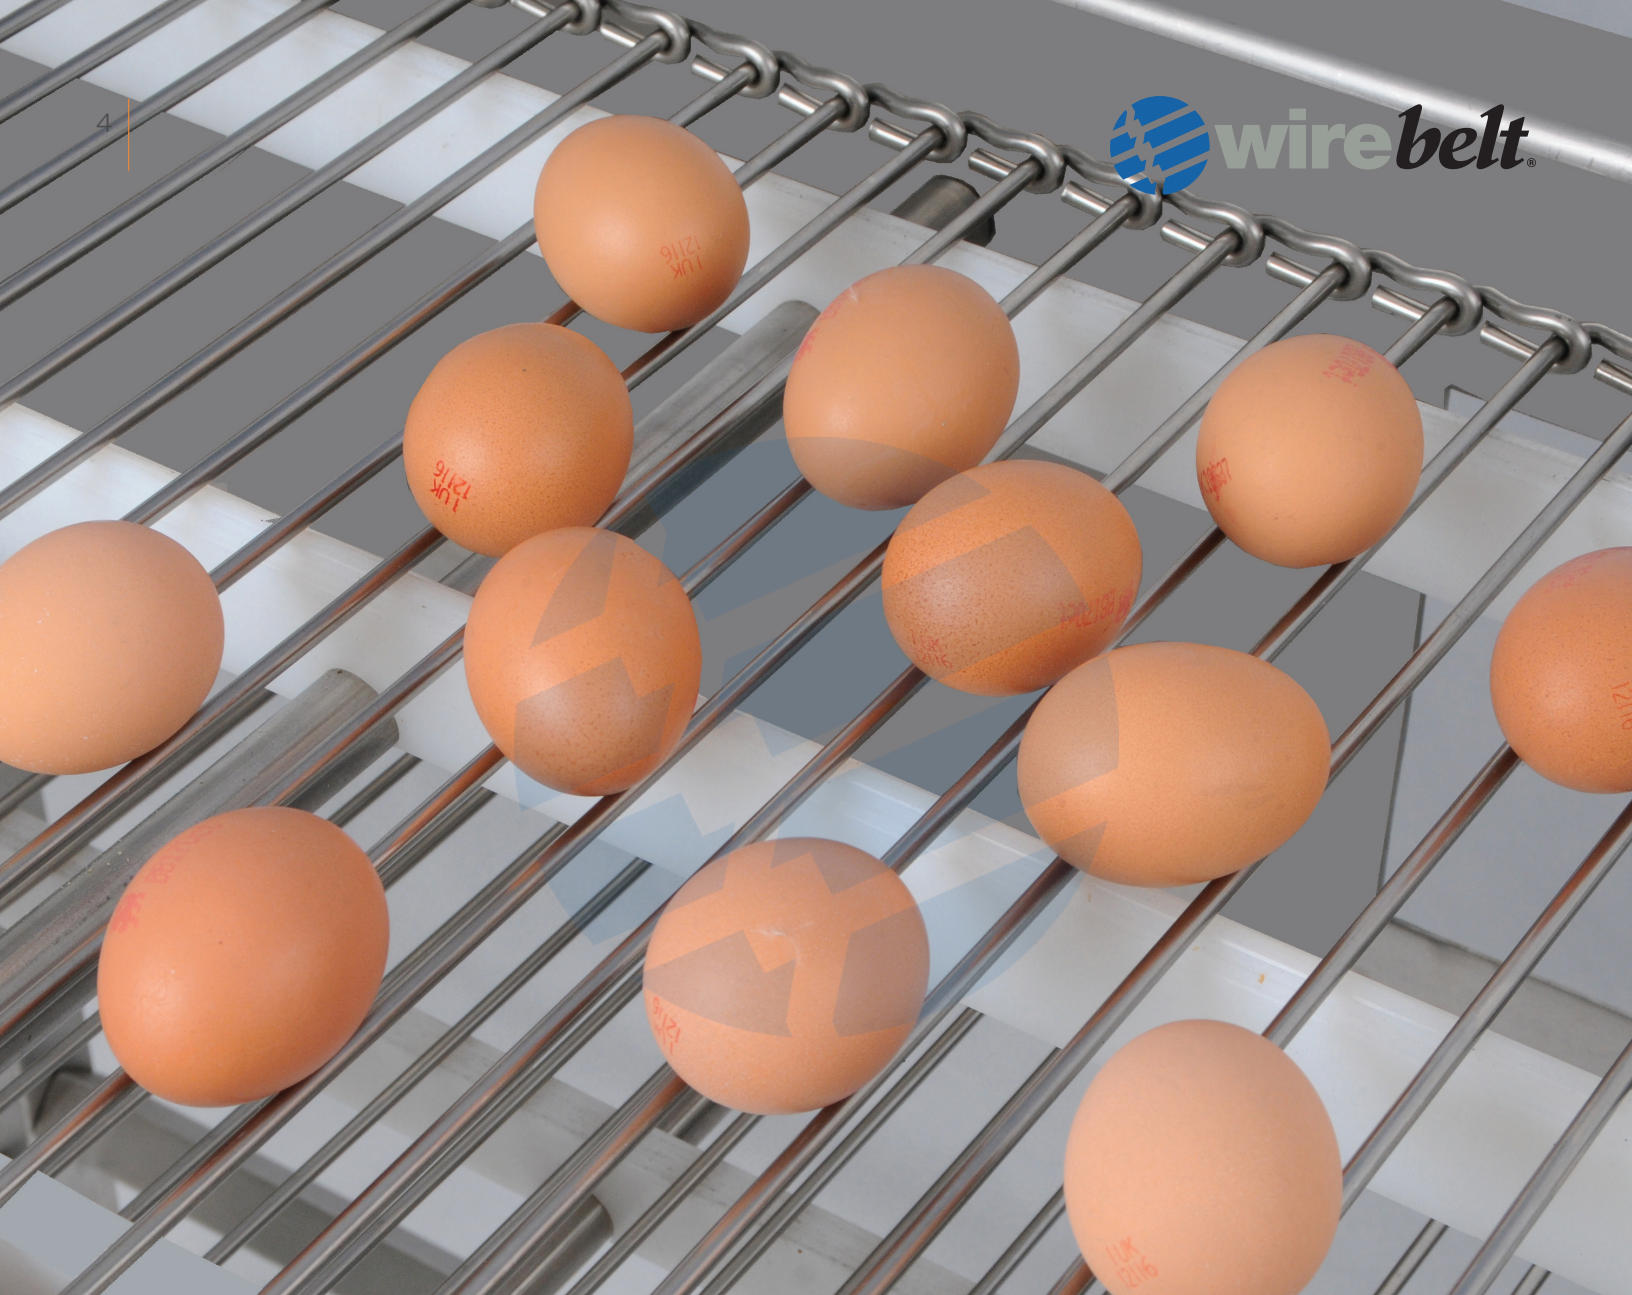

## LADDER-TRACK™ CONVEYOR BELTS

### TYPICAL APPLICATIONS

---

Ladder-Track™ conveyor belting has many and varied uses, below is a list of typical applications. If you have an application that is not listed below, contact our Technical Sales Engineers to see if Ladder-Track™ conveyor belt is the right belt for your needs.

- Baking
- Broiling
- Bun/Roll Production
- Dough Proofing
- Frying
- Glazing
- Grading
- Meat Tendering

## AVAILABLE BELT SPECIFICATIONS

START RUNNING LADDER-TRACK™ BELT					
WIRE GAUGE	WIRE SIZE (MM) (IN)		PITCH (MM) (IN)		WIDTHS
	5 Ga.	5.26 mm	.207"	19.05 mm	
7 Ga.	4.50 mm	.177"	15.88 mm	.625"	6" - 48"

## BELT MATERIALS AVAILABLE

Straight running Ladder-Track™ conveyor belt is available in 1.4301 (304) stainless steel.

## AVAILABLE DRIVE COMPONENT SPECIFICATIONS

START RUNNING LADDER-TRACK™ SPROCKETS					
WIRE GAUGE	NO. SPROCKET TEETH	OUTSIDE DIAMETER (MM) (IN)		OUTSIDE DIAMETER (MM) (IN)	
		5 Ga.	12	83.82 mm	3.30"
7 Ga.	11	65.07 mm	2.56"	51.59 mm	2.03"
7 Ga.	13	75.01 mm	2.95"	61.52 mm	2.42"
7 Ga.	15	84.99 mm	3.35"	71.50 mm	2.82"



## LADDER-TRACK™ DRIVE COMPONENTS

### DRIVE COMPONENT MATERIALS AVAILABLE

Straight running Ladder-Track™ sprockets and blanks are available in (303) stainless steel and acetal plastic.



### LADDER-TRACK™ BELT MAINTENANCE TOOL

The Ladder-Track™ belt maintenance tool makes for easy removal, repair or installation of Ladder-Track™ conveyor belts.




Part# TC010





Distributed by:



Our policy is one of continuous improvement and we reserve the right to change specifications at any time and without notice, or modify these to suit manufacturing processes.

