



LADDER-TRACK™

WIRE BELT'S NEW CONVEYOR BELT!

- Flat uniform surface for gentle product handling
- High tensile rods resist permanent distortion and reduce down-time
- Positive drive to ensure there are no tracking issues
- Easy belt assembly and disassembly due to simple open construction
- Smooth edges for easy movement around transfers



154 Harvey Road, Londonderry, NH 03053
Tel: 603-644-2500 | sales@wirebelt.com | www.wirebelt.com

Available Belt Specifications

STRAIGHT RUNNING LADDER-TRACK™ BELT					
WIRE GAUGE	WIRE SIZE (MM) (IN)		PITCH (MM) (IN)		WIDTHS
5 Ga.	5.26 mm	.207"	19.05 mm	.75"	6" - 48"
7 Ga.	4.50 mm	.177"	15.88 mm	.625"	6" - 48"

Belt Materials Available


Straight running Ladder-Track™ conveyor belt is available in 1.4301 (304) stainless steel.

Available Drive Component Specifications

STRAIGHT RUNNING LADDER-TRACK™ SPROCKETS					
WIRE GAUGE	NO. SPROCKET TEETH	OUTSIDE DIAMETER (MM) (IN)		ROOT DIAMETER (MM) (IN)	
5 Ga.	12	83.82 mm	3.30"	68.07 mm	2.68"
7 Ga.	11	65.07 mm	2.56"	51.59 mm	2.03"
7 Ga.	13	75.01 mm	2.95"	61.52 mm	2.42"
7 Ga.	15	84.99 mm	3.35"	71.50 mm	2.82"

Drive Component Materials Available

Straight running Ladder-Track™ sprockets and blanks are available in (303) stainless steel and acetal plastic.

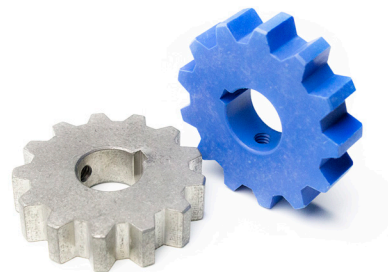

Ladder-Track™ Belt Maintenance Tool

The Ladder-Track™ belt maintenance tool makes for easy removal, repair or installation of Ladder-Track™ conveyor belts.



154 Harvey Road, Londonderry, NH 03053
 Tel: 603-644-2500 | sales@wirebelt.com | www.wirebelt.com