

LADDER-TRACK™ CONVEYOR BELT

MANUFACTURED BY WIRE BELT COMPANY FOR HIGH QUALITY



LADDER-TRACK™ ADVANTAGES:

- Flat uniform surface for gentle product handling
- High tensile rods resist permanent distortion and reduce down-time
- Positive drive to ensure there are no tracking issues
- Easy belt assembly and disassembly due to simple open construction
- Smooth edges for easy movement around transfers



WWW.WIREBELT.COM

LADDER-TRACK™ CONVEYOR BELT

MANUFACTURED BY WIRE BELT COMPANY FOR HIGH QUALITY

AVAILABLE BELT SPECIFICATIONS

STRAIGHT RUNNING LADDER-TRACK™ BELT				
Wire Gauge	Wire Size		Pitch	Widths
5 Ga.	5.26 mm	.207"	19.05 mm	6" - 48"
7 Ga.	4.50 mm	.177"	15.88 mm	6" - 48"

BELT MATERIALS AVAILABLE


Straight running Ladder-Track™ conveyor belt is available in 1.4301 (304) stainless steel.

AVAILABLE DRIVE COMPONENT SPECIFICATIONS

STRAIGHT RUNNING LADDER-TRACK™ SPROCKETS					
Wire Gauge	No. Sprocket Teeth	Outside Diameter (mm) (in)		Root Diameter (mm) (in)	
5 Ga.	12	83.82 mm	3.30"	68.07 mm	2.68"
7 Ga.	11	65.07 mm	2.56"	51.59 mm	2.03"
7 Ga.	13	75.01 mm	2.95"	61.52 mm	2.42"
7 Ga.	15	84.99 mm	3.35"	71.50 mm	2.82"

DRIVE COMPONENT MATERIALS AVAILABLE

Straight running Ladder-Track™ sprockets and blanks are available in (303) stainless steel and acetal plastic.

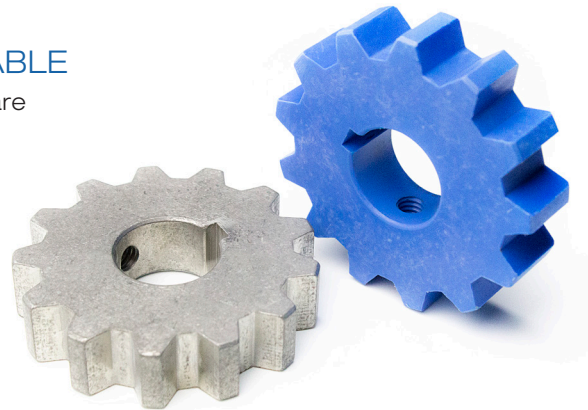

LADDER-TRACK™ BELT MAINTENANCE TOOL

The Ladder-Track™ belt maintenance tool makes for easy removal, repair or installation of Ladder-Track™ conveyor belts.



Wire Belt Company of America
17 Colby Court, Bedford, NH 03110
Tel: (603) 644-2500 | Fax: (603) 644-3600
Email: sales@wirebelt.com
www.wirebelt.com